

Trade Select™


Trade Select™ SilverFloor™

Product Code: TSSF

Underfloor insulation

For use under floors that are directly adhered to floor joists

Australian Patent: 2008203107

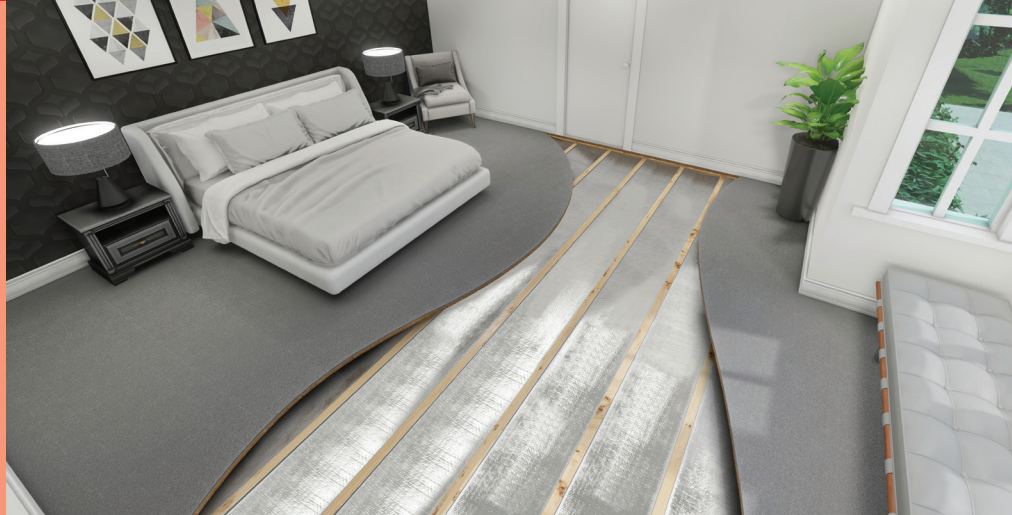

Trade Select™ SilverFloor™ is a Extra Heavy Duty, vapour permeable floor insulation, designed for use under floors with a sealed air space between flooring and enclosed sub-floor space. Double-sided reflective surfaces provide increased R-value to your floor system. 5 mm weep holes at 400 mm intervals in the membrane structure allow water and water vapour to permeate through, preventing moisture build-up under flooring.


- > Double-sided foil radiant barrier
- > High strength, light weight
- > Low flammability
- > Weep holes allow water to drain

Application

Trade Select™ SilverFloor™ is designed for use as an insulation under floors with a sealed air space between flooring and enclosed sub-floor space. Where the sub-floor space is exposed to wind, e.g. in pole construction, a lining should be installed under the floor joists.

Construction

Trade Select™ SilverFloor™ is a flexible six-layer product with anti-oxidant uv-stabilised woven polypropylene and polymer flood coat layers, backed on either side with fire-resistant polymer adhesive and 97% reflective aluminium foil.

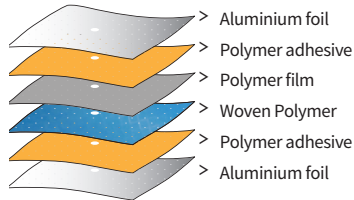

Ametalin utilises Advanced Laminating Technology; the polymer adhesive remains tacky indefinitely and provides superior resistance to heat, fire and delamination.

Declared Total System R-Values

Suspended Framed Floors

enclosed sub-floor
unventilated with
Trade Select™
SilverFloor™ installed
between joists or
over bearers

Winter **R_f 3.36**

Summer **R_f 1.52**

Suspended framed floors

unenclosed sub-floor,
ventilated with
Trade Select™
SilverFloor™ installed
between joists or
over bearers

Winter **R_f 2.05**

Summer **R_f 0.77**

R-values apply to typical conditions for mainland Australian capital cities and have been calculated by an independent consulting engineer in accordance with AS/NZS 4859.1:2018. For detailed design of building systems, seek advice based on actual site conditions from a qualified licensed engineer.

To ensure optimum thermal insulation performance, ensure a ≥ 90 mm air gap adjacent to the upper foil side of the product. The contribution of this product to the total system R-value depends on installation and environmental conditions.

Material Properties and Classifications

Trade Select™ SilverFloor™ Extra Heavy Duty classifications in accordance with AS/NZS 4200.1:2017 and AS/NZS 4859.1:2018

Criteria	Reference	Result	Requirement
Flammability Index	AS 1530.2-1993	Low ≤ 5	High (> 5) / Low (≤ 5)
Nominal Thickness		0.17 mm	Value
Duty	AS/NZS 4200.1:2017	Extra Heavy	Classification
Tensile Strength Machine Direction	AS 1301.448s-91	13.9 kN/m	Min 12.5 kN/m
Tensile Strength Lateral Direction	AS 1301.448s-91	12.7 kN/m	Min 7.5 kN/m
Edge Tear Machine Direction	TAPPI T 470 om-89	480 N	Min 80 N
Edge Tear Lateral Direction	TAPPI T 470 om-89	456 N	Min 80 N
Vapour Control	ASTM E96	Class 3 Vapour Permeable	Class 1 to 4
Vapour Permeance	ASTM E96	0.3009 $\mu\text{g}/\text{N.s}$	Value
Water Control	AS/NZS 4201.4:1994	Non-Water Barrier	Classification
Air Control	AS/NZS 4200.1:2017	Non-Air Barrier	Classification
Resistance to Dry Delamination	AS/NZS 4201.1:1994	Pass	Pass
Resistance to Wet Delamination	AS/NZS 4201.2:1994	Pass	Pass
Shrinkage (Repeated wetting & drying)	AS/NZS 4201.3:1994	0.0%	$< 0.5\%$
Electrical Conductivity	AS/NZS 4200.1:2017	Electrically Conductive	Classification
Emittance Value	AS/NZS 4201.5:1994	Printed side: 0.03, Foil side: 0.03	Value
Emittance Classification	AS/NZS 4200.1:2017	IR Reflective, IR Reflective	Classification
Emittance Category	AS/NZS 4200.1:2017	RR	Category

NCC Compliant

Trade Select™ SilverFloor™ complies with AS/NZS 4859.1:2018 and AS/NZS 4200.1:2017, and therefore meets all of the requirements of the *National Construction Code* of Australia for insulation and sarking-type materials.

Fire Performance

Flammability Index

Low (≤ 5)

Tested in accordance with AS1530.2-1993 - *Methods for fire tests on building materials, components and structures Part 2: Test for flammability of materials.*

Dimensions

500 mm x 60 m (30 m²)

1500 mm x 60 m (90 m²)

Nominal Thickness: 0.17 mm

Specification Notes

When specifying state the following:
Product Name: Trade Select™ SilverFloor™

The insulation to be installed shall be Trade Select™ SilverFloor™ Vapour Permeable reflective underfloor insulation and shall be installed in accordance with the instructions issued by them and in accordance with AS 4200.2:2017.

Emittance Value: 0.03, 0.03

Emittance Classification: IR Reflective, IR Reflective

Vapour Control Classification: Vapour Permeable, 0.3009 $\mu\text{g}/\text{N.s}$

Water Control Classification: Non-water Barrier

Duty: Extra Heavy in accordance with AS/NZS 4200.1:2017

Complete details available on our website:

<http://www.tradeselect.co/>

Handling and Storage

This product must be stored under cover in a clean, dry place in the pack provided.

Durability may be affected by environmental factors, including chemical and airborne pollutants, if used in industrial or farm buildings.

Australian designed for Australian conditions. Manufactured by: Ametalin 9-11 Playford Crescent, Salisbury North S 5108 T: +61 8 8285 6955 F: +61 8 8285 5911 E: info@tradeselect.co

© 2020 Ametalin All Rights Reserved. Ametalin is a division of Amalgamated Metal Industries Pty. Ltd. Product information in this publication and otherwise supplied to users is based on our general experience and is given in good faith, but due to factors outside our knowledge and control which may affect the use of products, no warranty is given or implied with respect to this information or the product itself regarding the suitability of the product for any particular purpose. The usage of this and other building membranes will affect moisture migration in the building element. The purchaser should independently determine the suitability of the product for the intended purpose. For large projects with complex air-conditioning and condensation issues, designers may wish to contact our technical department. Product colour may vary from batch to batch. Amalgamated Metal Industries Pty. Ltd. reserves the right to amend product specifications without prior notice. Information provided is considered to be true and correct at the time of publication. Complete details including installation instructions are available on our website: www.tradeselect.co TPM-21019-0

Distributed by:

NSW / ACT / VIC / TAS

RM INDUSTRIES

Phone: 03 9786 8449

Email: info@rmindustries.com.au

www.rmindustries.com.au

SA / WA / NT / QLD

REFLEX INSULATION

Phone: 1300 720 185

Email: info@reflexinsulation.com.au

www.reflexinsulation.com.au