




Protect what's important

Introducing
Trade Select™ FireSark™

Sarking insulation and wall wrap for passive fire protection
in residential and commercial buildings.

THE SUPERIOR ALL-IN-ONE SARKING FOR NON-COMBUSTIBLE CONSTRUCTIONS.

When performance is paramount.

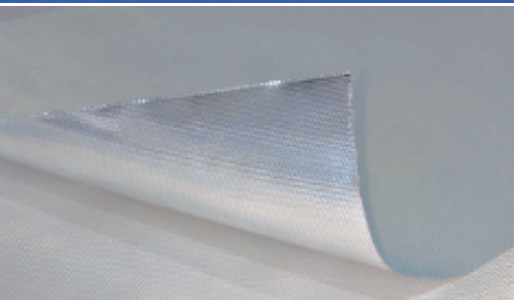

Trade Select™ FireSark™

The all-in-one sarking solution for roofs and walls for the most extreme Bushfire Attack Levels and Non-Combustible Constructions.



Trade Select™ FireSark™ is a reflective insulation, thermal, water, vapour and air control membrane that meets non-combustible requirements. Designed for use as a roof sarking and wall wrap in multi-level residential, commercial and office buildings in all regions of Australia.

Passive fire protection systems can save lives by offering adequate fire performance to assist occupants sufficient time to escape a building.

Trade Select™ FireSark™ is our best in class product, designed to complement passive fire protection systems offering a superior barrier to resist flame penetration and ember attack in the most extreme bushfire-prone areas.

- Assessed by Ignis Solutions professional fire engineers as permitted to be used where non-combustible material is required.
- Ideal secondary physical barrier offering a second shield to ember attack.
- The superior choice when fire protection is the ultimate priority for multi-level non-combustible external wall constructions.
- Advanced thermal performance, reflects 97% radiant heat flow improving the thermal comfort and energy efficiency of your home.
- Suitable for use in all BALs Zones: BAL-LOW, BAL-12.5, BAL-19, BAL-40 & Flame Zone BAL-FZ.
- Also available in breather.

✓ AS 1530.1–1994 ✓ AS 1530.2–1993 ✓ AS/NZS 1530.3:1999 ✓ AS 3959–2009

Superior fire performance ideal for Class 2-9 multi-level residential & commercial buildings including:

- ▶ multi-unit residentials
- ▶ healthcare facilities
- ▶ hotels
- ▶ schools
- ▶ shopping centres
- ▶ office buildings
- ▶ warehouses and factories



Typical Applications

Residential Tile and Metal Roofs		ACP/Lightweight Clad Walls		Brick Veneer Walls	
Winter	R _T 1.0	Winter	R _T 3.1	Winter	R _T 3.2
Summer	R _T 1.5	Summer	R _T 2.8	Summer	R _T 3.0
<p>Typical Residential 22° Pitched Tile / Metal Roof with one layer of Trade Select FireSark™ CALCULATION REFERENCES: Tile Roof 299r38fs / Metal Roof 299r37fs. Typical Aluminium Composite Panel Wall ACP/Lightweight Cladding fixed to battens with one layer of Trade Select™ FireSark™ fixed to 90mm stud, R2.5 fibrous insulation & 10mm plasterboard CALCULATION REFERENCE: 299w40fs. Typical Brick Veneer Wall with one layer of Trade Select™ FireSark™ and R2.5 insulation CALCULATION REFERENCE: 299w39fs.</p>					

Product Specifications

Product Name	Width (mm)	Length (m)	m ² Per Roll	Weight (kg)	Product Code
FireSark™	1350	30	40.5	10	FS-40

Trade Select™

NSW / ACT / VIC / TAS - RM INDUSTRIES

Email: info@rmindustries.com.au

Phone: 03 9786 8449

www.rmindustries.com.au

SA / WA / NT - REFLEX INSULATION

Email: info@reflexinsulation.com.au

Phone: 1300 720 185

www.reflexinsulation.com.au

QLD - AUSTRALIAN REFLECTIVE INSULATION

Phone: 1300 37 38 39 Fax: (07) 3102 0501

Email: sales@australianreflectiveinsulation.com.au

www.australianreflectiveinsulation.com.au