


GENERAL INSTALLATION GUIDE


Double Brick Cavity Installation (514mm wide board)

DOUBLE BRICK CAVITY INSTALLATION

1. Construct and prepare the inner leaf of brickwork to allow the installation of the PIRMAX GR-ISO3 Panel by removing excess mortar and mortar droppings. Ensure the wall ties are kept clean of mortar and are placed at recommended centres.
2. Secure the PIRMAX GR-ISO3 Panel tight against the external side of the inner leaf using the wall ties and approved retaining clips.
3. Ensure the minimum required residual cavity is maintained in accordance with the NCC/BCA provision.

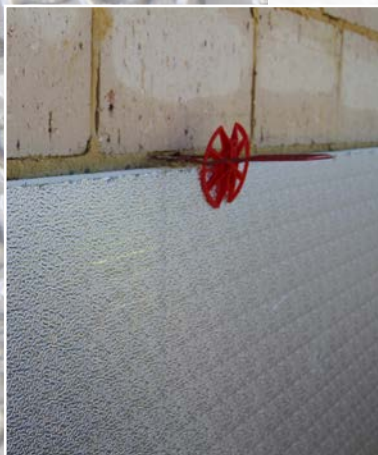

Double Brick Cavity Wall Side Elevation

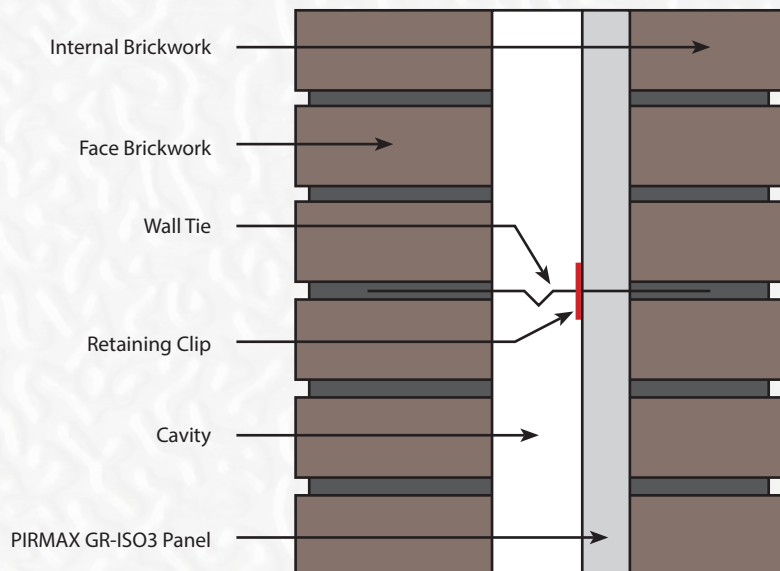

Distributed by:

reflex
INSULATION

Reflex Insulation Pty Ltd
Phone: **1300 720 185**
Email: **info@reflexinsulation.com.au**
www.reflexinsulation.com.au

AUSTRALIAN OWNED, AUSTRALIAN MANUFACTURED. Manufactured by: PIRMAX Pty Ltd 9/170 Boundary Road, Braeside VIC 3195 T: 03 9587 0955 F: 03 9587 0966 E: pimax@bigpond.com © 2019 Reflex Insulation Pty Ltd All Rights Reserved. Disclaimer: The installer/user of these products will need to determine if the product is suitable for the use in the intended application. Information on this brochure is believed to be correct at the time of publication. Pimax Pty Ltd take no responsibility for the misinterpretation, misuse and misrepresentation of information provided on this brochure. Pimax Pty Ltd reserves the right to change the content of this publication without any notice.

Issued May 2019 • Version 1.1