

GENERAL INSTALLATION GUIDE


Concrete Wall Installation

CONCRETE WALL INSTALLATION

1. Fix the selected clips for the furring channel, at spacings required for the plasterboard.
2. Install the PIRMAX HR panel by pushing the panel onto the clips, ensuring the wings of the clip have pushed through the panel, and the panel is butting up to the concrete wall. If required trim and neaten the foil around the clips to avoid any foil detaching from the panel.
3. Join each PIRMAX HR panel side by side during the installation, butting each panel to provide continual thermal performance.
4. Furring channel must be fitted by clipping into the channel clips. The furring channel is to be fitted as closely as possible to the PIRMAX HR panel.
5. Once all the above has been carefully installed, the plasterboard lining can then be fitted.

TAPING

It is recommended the joints to be taped with a 48mm or 72 mm wide high quality aluminium foil tape. When taping, ensure the surfaces are clean, sound and free of dust and contaminates. Use a tape applicator to apply appropriate pressure to the tape.

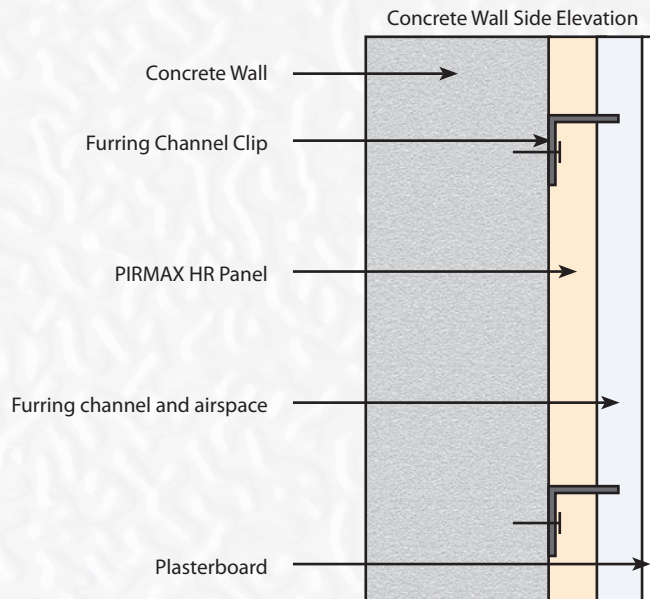

Distributed by:

reflex INSULATION	Phone: 1300 720 185	Email: info@reflexinsulation.com.au	
	New South Wales / ACT	Western Australia	South Australia / Northern Territory
	Fax: (02) 4623 1616 PO Box 377, Narellan NSW 2567 Woodpark Rd, Smithfield NSW	Fax: (08) 9467 0570 PO Box 1677, Canning Vale DC WA 6970 Kurnall Rd, Welshpool WA	Fax: (08) 8284 1293 PO Box 77, Salisbury South BC SA 5106 Churchill Rd North, Cavan SA

AUSTRALIAN OWNED, AUSTRALIAN MANUFACTURED. Manufactured by: PIRMAX Pty Ltd 9/170 Boundary Road, Braeside VIC 3195 T: 03 9587 0955 F: 03 9587 0966 E: pirmax@bigpond.com © 2016 Reflex Insulation Pty Ltd All Rights Reserved. Disclaimer: The installer/user of these products will need to determine if the product is suitable for the use in the intended application. Information on this brochure is believed to be correct at the time of publication. Pirmax Pty Ltd take no responsibility for the misinterpretation, misuse and misrepresentation of information provided on this brochure. Pirmax Pty Ltd reserves the right to change the content of this publication without any notice.