


FIXFLEX™ WRAP FASTENERS - PRODUCT BROCHURE

Product Description

The FixFlex™ Wrap system is designed as a fast wrap installation system to quickly and securely fix insulation wrap to both steel frame and timber frames. The FixFlex™ Battery Nailer is powered by the latest battery technology, with no need for gas canisters it offers premium reliability and safety.

Features

- ▶ Adjustable nail depth via screw on barrels
- ▶ Specialised magnetic adaptor
- ▶ Threaded nail designed specifically for steel frame
- ▶ 1mm thin galvanised washer

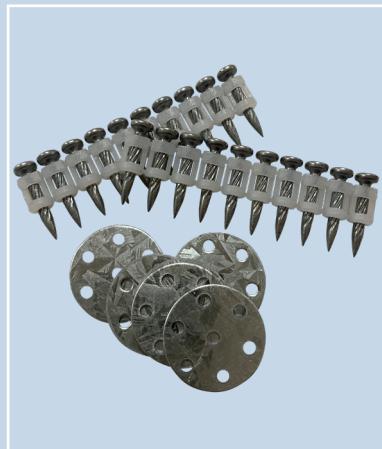

Typical Applications

- ▶ For installing wall wrap onto timber and steel frame construction systems
- ▶ Termite barrier to concrete slab
- ▶ Steel frame to concrete slab
- ▶ Steel to steel



Fastener Details

Base Material	Carbon Steel
Hardness	50-55 HRc
Length	22mm
Head Diameter	6.2mm
Shank Diameter	2.9mm
Finish	Mechanical Zinc to 10um+

Product Testing

Concrete Testing

Working Loads	25mpa
Pull Out Strength	2.0kn
Shear Strength	3.0kn

Steel to Steel Testing

Working Loads	0.75 to 0.75bmt
1 Nail Shear Strength	2.8kn
2 Nail Shear Strength	3.6kn

Product Use

It is essential that the user evaluate the FixFlex™ Insulation Fasteners to determine whether they are fit for a particular purpose and user's method of application. Please refer to the insulation manufacturers guidelines for the installation layout.



Distributed by:



Reflex Insulation Pty Ltd
Phone: 1300 720 185
Email: info@reflexinsulation.com.au
www.reflexinsulation.com.au